

# Circulator Pump

The VADA V2060-C Circulator Pump is designed for the circulation of hot water in heating and domestic hot water systems. It is capable of handling liquids up to 110°C.

### 3 Speed Operation

Flexibility in system design and performance

### DR Brass Pump Housing

Suitable for use on both open and closed systems

### Built in thermal protection

Prevents damage to the pump through overheating

### Barrel Unions Included

Quick and easy connection

### Maximum operating pressure:

1000 kPa

### Maximum flow rate:

60 l/min




9502295  
V2060-C Circulator Pump

AS/NZS 4020 compliant

## Applications

For the circulation of hot water in heating and domestic hot water systems. Suitable for use on both open and closed systems.

Table of Hydraulic Performance & Power Consumption

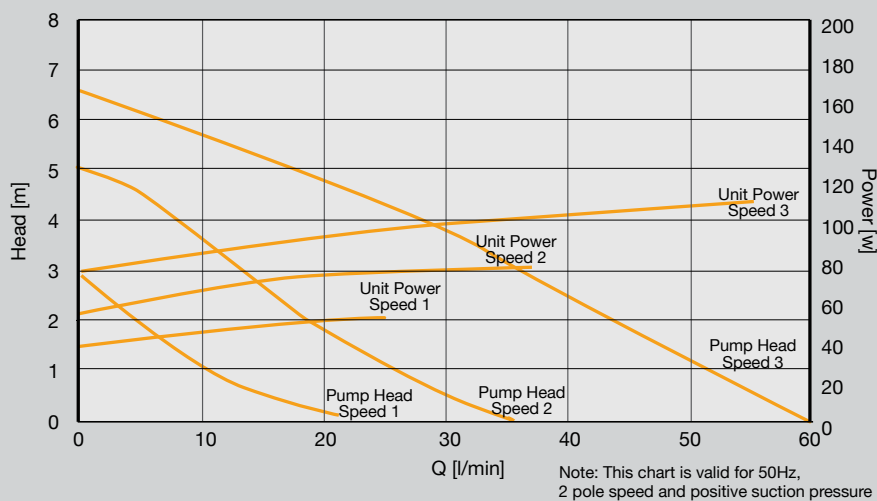

Reece. Works for you.™

Call 1800 032 566 or visit [www.reece.com.au](http://www.reece.com.au) for your nearest Reece branch. Due to limitations in the printing process the colours in this brochure are a guide only.

The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. The manufacturer/distributor takes no responsibility for printing errors.

