

ARCO GRIFO

QUARTER TURN SINGLE AND DOUBLE GARDEN TAPS



VITAQ
SYSTEM

made in
spain
by arco

arco®

COMPACT AND EASY TO USE,

ARCO GRIFO'S INNOVATIVE TAP RANGE DELIVERS FULL WATER FLOW IN JUST A QUARTER TURN.

- European manufactured quality
- One-piece body means no leaks
- Anti lime ball valve for long life
- Flexibility with double design: independent isolation of each outlet



made in
spain
by arco

ONE PIECE BODY

GRIFO taps are manufactured with an innovative one piece brass design, which eliminates the possibility of leaks through the main body. The one whole piece construction provides greater strength and security.



VITAO SYSTEM – ANTI LIME BALL FOR LONG LIFE

This smart design reduces loss of pressure, keeping a constant flow rate and avoids any noise. The VITAO SYSTEM eliminates the lime problems associated with traditional valve designs.



BRASS


POLYMER

EXTERNAL LEAKTIGHTNESS

A double seal placed on the stem ensures external leak tightness. This double joint system guarantees safety against external leakage over time and during long term use.

INTERNAL LEAKTIGHTNESS

The supporting clip is placed in the valve to push the seat against the stem-ball. This system cannot be dismantled, avoiding improper manipulations.

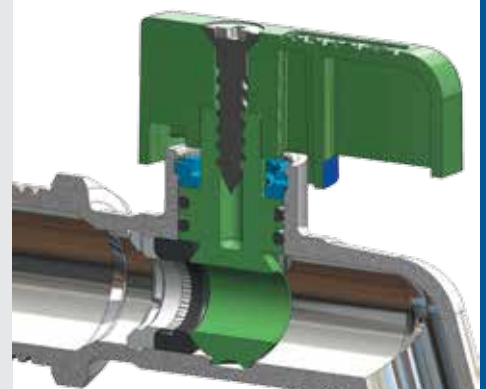

ARCO 15MM SINGLE GRIFO

SPECIFICATIONS

- Max. pressure 2,000kPa
- Nominal pressure 1,600kPa
- Max. temperature 40 °C
- Polymer stem and ball
- Double EPDM seal




This tap is ideal for:

- Indoor use: The compact design makes it suitable for use inside homes and also balconies and garages.
- Outdoor use: Yards, gardens, terraces, etc.

| Product Code | Description | Inlet size | Outlet size |
|--------------|-------------------------------|------------|-------------|
| 106227 | Grifo 1/2" Female x 3/4" Male | 15mm inlet | 20mm outlet |
| 106228 | Grifo 1/2" Male x 3/4" Male | 15mm inlet | 20mm outlet |


FEMALE

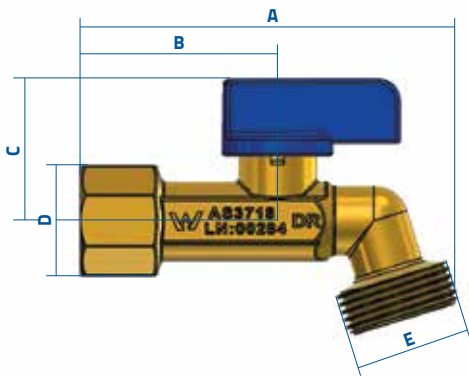

| Measure | A | B | C | D | E |
|-------------|----|----|----|-------|-------|
| 1/2F x 3/4M | 86 | 45 | 32 | G 1/2 | G 3/4 |

G. Thread ISO 228


MALE

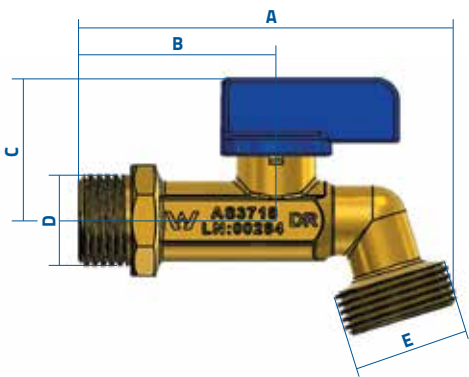


| Measure | A | B | C | D | E |
|-------------|----|----|----|-------|-------|
| 1/2M x 3/4M | 86 | 45 | 32 | G 1/2 | G 3/4 |

G. Thread ISO 228

| Item | Component | Material |
|------|-----------------|-------------------|
| 1 | Body | DR Brass |
| 2 | Handle | Zamak |
| 3 | Screw | Stainless steel |
| 4 | Supporting clip | POM |
| 5 | O-ring | EPDM |
| 6 | Aerator | Polyamide |
| 7 | Stem-ball | Anti-lime Polymer |
| 8 | Seat | EPDM |
| 9 | Supporting clip | POM |

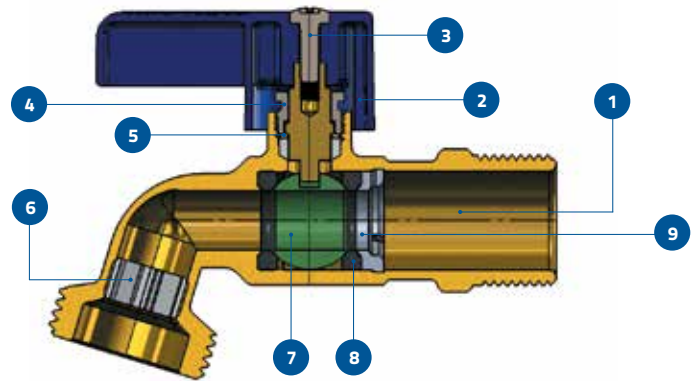

Pressure Loss

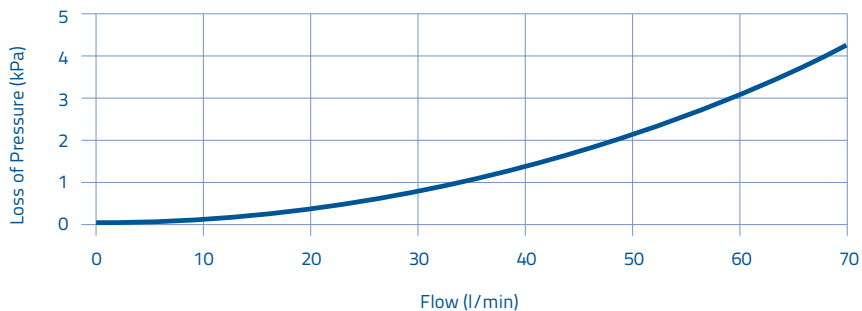

ARCO 20MM SINGLE GRIFO

SPECIFICATIONS

- Max. Pressure 2,500kPa
- Nominal pressure 1,600kPa
- Max. temperature 40 °C
- Brass Alloy ball
- Double PTFE seal




This tap is ideal for:

- Indoor use: The compact design makes it suitable for use inside homes and also balconies and garages.
- Outdoor use: Yards, gardens, terraces, etc.


| Product Code | Description | Inlet size | Outlet size |
|--------------|---------------------------|------------|-------------|
| 106229 | Grifo 3/4" Male x 1" Male | 20mm inlet | 25mm outlet |

| Measure | 3/4M x 1M |
|---------|-----------|
| A | 103 |
| B | 50 |
| C | 42 |
| D | G 1 |
| E | G 3/4 |


G. Thread ISO 228

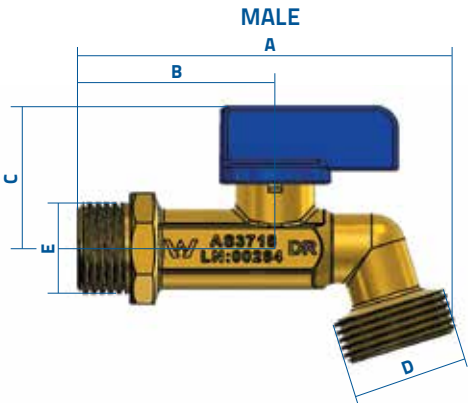

| Item | Component | Material |
|------|-----------------|----------------------|
| 1 | Handle | Zamak |
| 2 | Screw | Stainless Steel |
| 3 | Nut gland | DR Brass |
| 4 | Washer | DR Brass |
| 5 | Gland | PTFE |
| 6 | Body | DR Brass |
| 7 | Supporting clip | POM |
| 8 | Seat | NBR |
| 9 | Ball | PTFE Coated DR Brass |
| 10 | Aerator | Polyamide |
| 11 | Stem | DR Brass |

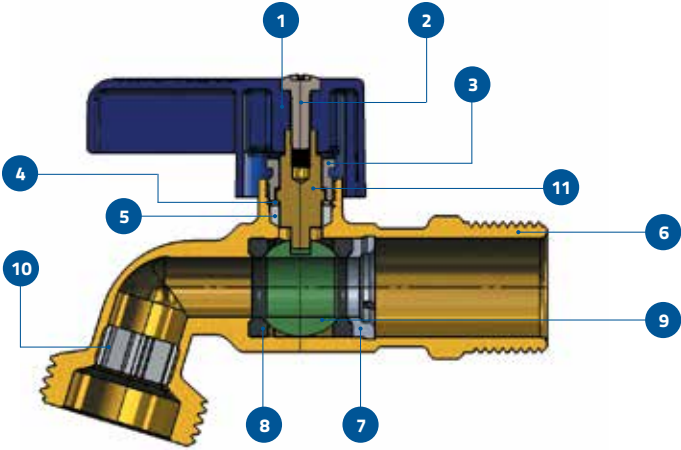

Pressure Loss

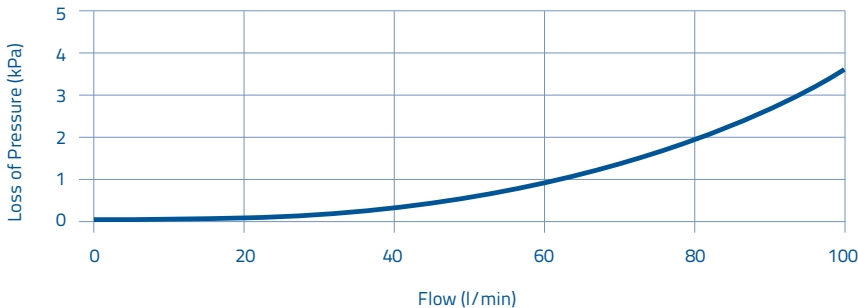

ARCO DOUBLE GRIFO

SPECIFICATIONS

- Max. pressure 2,000kPa
- Nominal pressure 1,600kPa
- Max. temperature 40 °C
- Polymer stem and ball
- Double EPDM seal




This tap is ideal for:

- Installations which require 2 independent outlets from a single connection.
- Indoor use: The compact design makes it suitable for use inside homes and also, balconies and garages.
- Outdoor use: Yards, gardens, terraces, etc. Ability to connect hose and sprinkler system together.

| Product Code | Description | Inlet size | Outlet size |
|--------------|--------------------------------------|------------|-------------|
| 106230 | Double Grifo 1/2" Female x 3/4" Male | 15mm inlet | 20mm outlet |
| 106231 | Double Grifo 1/2" Male x 3/4" Male | 15mm inlet | 20mm outlet |


FEMALE

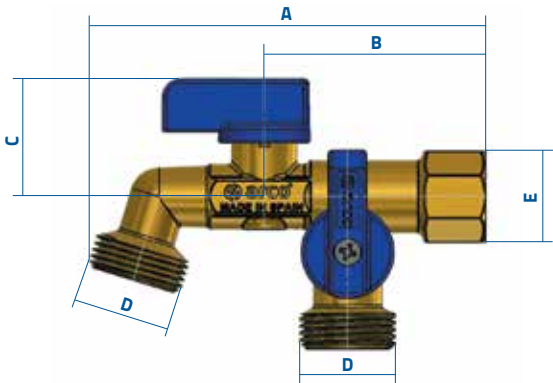

| Measure | A | B | C | D | E |
|-------------|-----|----|----|-------|-------|
| 1/2F x 3/4M | 109 | 61 | 32 | G 3/4 | G 1/2 |

G. Thread ISO 228


MALE

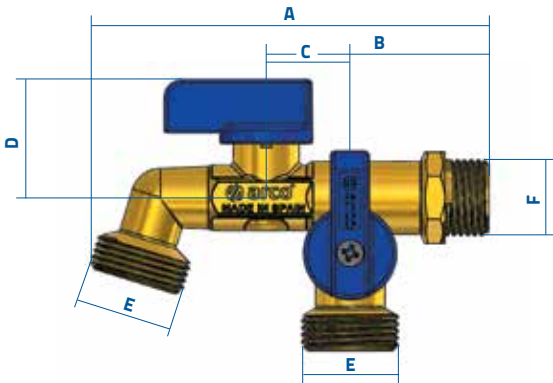


| Measure | A | B | C | D | E | F |
|-------------|-----|----|----|----|-------|-------|
| 1/2M x 3/4M | 109 | 61 | 23 | 32 | G 3/4 | G 1/2 |

G. Thread ISO 228

| Item | Component | Material |
|------|-----------------|-------------------|
| 1 | Body | DR Brass |
| 2 | Handle | Zamak |
| 3 | Screw | Stainless steel |
| 4 | Supporting clip | POM |
| 5 | O-ring | EPDM |
| 6 | Stem-ball | Anti-lime Polymer |
| 7 | Aerator | Polyamide |
| 8 | Supporting clip | POM |
| 9 | Seal | EPDM |

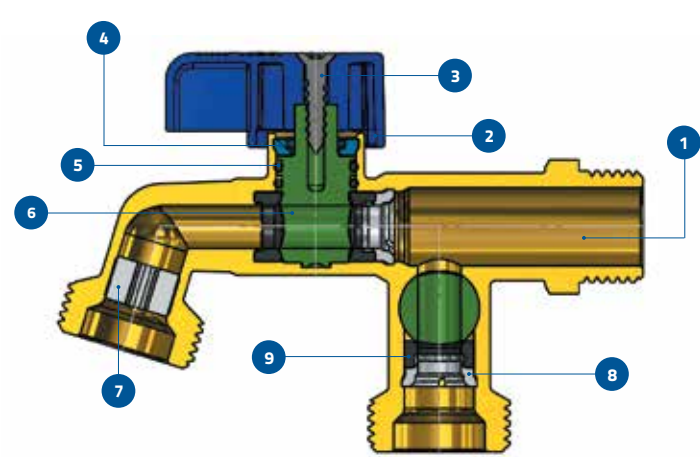

Pressure Loss for simultaneous operation of the two outputs

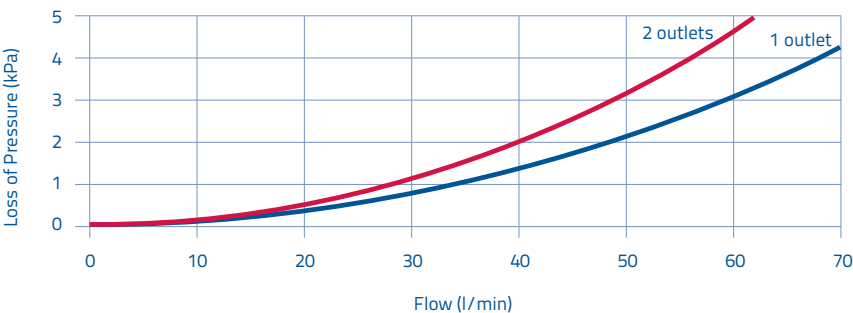

Reece. Works for you.™

Call **1800 032 566** or visit **www.reece.com.au** for your nearest Reece store.
Due to limitations in the printing process the colours in this brochure are a guide only.

The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. The manufacturer/distributor takes no responsibility for printing errors.
All products enjoy a product replacement warranty. For full warranty details visit www.reece.com.au/productquality

V1 [BROCHURE CODE 2131405]

